

**POLYKEN®**  
Engineered Tape Technologies

**PATCO®**  
PERFORMANCE ENGINEERED TAPES

# AEROSPACE TAPES





**POLYKEN**<sup>®</sup>  
Engineered Tape Technologies

Whether flame retardance, UV or moisture resistance, abrasion protection, or another application-specific performance feature, Polyken Engineered Tape Technologies provide the ultimate balance of performance attributes to meet challenging specification-driven applications for the aerospace industry.

**PATCO**<sup>®</sup>  
PERFORMANCE ENGINEERED TAPES

PATCO engineers understand that every Aerospace application - from moisture barrier to surface protection - has inherent performance requirements that call for customized solutions. That is why for more than 50 years, PATCO has provided the Aerospace OEM and aftermarket industry with the world's most advanced portfolio of Performance Engineered Tapes.

<b>CARGO PIT SEALING TAPES</b>	<b>03</b>
<b>MOISTURE BARRIER TAPES</b>	<b>04</b>
<b>CARPET TAPES</b>	<b>05</b>
<b>MOUNTING TAPES</b>	<b>06</b>
<b>FOIL &amp; SPEED TAPES</b>	<b>07</b>
<b>INTERIOR SURFACE PROTECTION TAPES</b>	<b>08</b>
<b>EXTERIOR SURFACE PROTECTION TAPES</b>	<b>09</b>
<b>MEDIA BLAST &amp; MASKING TAPES</b>	<b>10</b>
<b>CLOTH TAPES</b>	<b>11</b>
<b>PE FILM TAPES</b>	<b>12</b>
<b>ELECTRICAL TAPES</b>	<b>13</b>
Specification Table	14
Shelf Life & Storage	15
Other Products	15



# Cargo Pit Sealing Tapes

Flame-retardant, high tensile strength, and excellent puncture and tear resistance are required for covering seams as well as patching and repairing panels in critical aircraft cargo compartments.

POLYKEN cargo compartment tapes offer these features and more including lightweight constructions that help reduce overall aircraft weight for fuel and cost savings.



Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Weight oz/sy / g/sm	Operating Temp. °F / °C	Colors
----------------------	----------	------------------------------	-----------------------	-----------------------------------	----------------------------------	------------------------	----------------------------	--------

## Polyken 225FR Flame Retardant Duct Tape

PE Coated Cloth w/ Rubber Adhesive	Flame retardant. Durable, waterproof backing. High adhesion. Deca-BDE Free.	Non-passenger aircraft as a cargo seam tape. <i>Douglas DMS 1968E; Fokker Fk05-006, Fk05-113, FAR 25.853(a)(1)(i); Lockheed LCP-86-1226-A</i>	12.0 0.305	40 4.38	29 50.79	10.0 339.1	40 - 200 4 - 93	White Printed
------------------------------------	---	--	---------------	------------	-------------	---------------	--------------------	------------------

## Polyken 290FR Heavy-Duty Cargo Pit Tape

PE/Fiberglass Cloth w/ Rubber Adhesive	Flame retardant. Lightweight construction. Superior abrasion resistance. Resists lifting and curling. Removes clean. Deca-BDE Free.	Cargo hold floor panel seam sealing. Repair of cargo compartment liners. Covering pins and rivets. <i>FAR 25.853(a); FAR 25.855(d); Airbus ABD0031, Para 7.3.2 &amp; 7.4; Boeing 737-SL-25-115-B, 757-SL-25-085-B, 747-SL-25-195-B, 767-SL-25-112-B, 777-SL-25-037-B; Bombardier DSC 91-8-2 &amp; 91-18-2A</i>	13.0 0.330	38 4.16	150 262.69	13.4 453.3	40 - 200 4 - 93	White Printed
--	---	---	---------------	------------	---------------	---------------	--------------------	------------------

## Polyken 296FR Lightweight Cargo Pit Tape


Fiberglass Cloth w/ Acrylic Adhesive LDPE Liner	Bromide-free and flame-retardant. Conformable to accommodate corners. Repositionable and clean removal. Lightweight construction saves cost.	Lightweight tape for cargo hold floor panel seam sealing. Repair of cargo compartment liners. Covering pins and rivets. <i>FAR 25.853(a); FAR 25.855(d); Airbus ABD0031, Para 7.3.2 &amp; 7.4; Boeing BMS5-146M, 737-SL-25-115-B, 757-SL-25-085-B, 747-SL-25-195-B, 767-SL-25-112-B, 777-SL-25-037-B</i>	7.0 0.178	45 4.92	134 234.67	6.8 210.0	-40 - 275 -40 - 135	White P or U/P
---	--	---	--------------	------------	---------------	--------------	------------------------	-------------------

## Polyken 297 Multi-Purpose Cargo Pit Tape (Unprinted)

Fiberglass Cloth w/ Rubber Adhesive LDPE Liner	Flame-retardant. High-tensile fiberglass backing. Superior abrasion and moisture resistance. Resists lifting and curling. High shear adhesive maintains seal under loads. Deca-BDE Free.	Mid-weight tape for cargo hold floor panel seam sealing. Repair of cargo compartment liners. Covering pins and rivets. <i>FAR 25.853(a); FAR 25.855(d); Boeing 737-SL-25-115-B, 757-SL-25-085-B, 747-SL-25-195-B, 767-SL-25-112-B, 777-SL-25-037-B; Bombardier DSC 91-18-2A</i>	8.0 0.203	50 5.47	150 262.69	8.1 274.7	40 - 200 4 - 93	White
--	--	--	--------------	------------	---------------	--------------	--------------------	-------

# Moisture Barrier Tapes

PATCO moisture barrier tapes offer conformability, exceptional resistance to water, chemicals, solvents, abrasion, and puncture. Designed to provide a waterproof seal on aircraft floor boards, PATCO moisture barrier tapes are deployed in the entryway, lavatory, galley, and other areas where water and moisture can penetrate carpet or other flooring surfaces resulting in potential corrosion and damage to critical aircraft systems.

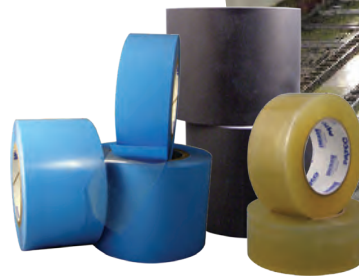

Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Weight oz/sy / g/sm	Operating Temp. °F / °C	Colors
----------------------	----------	------------------------------	-----------------------	-----------------------------------	----------------------------------	------------------------	----------------------------	--------

## Patco 1800 PVC Moisture Barrier Tape

PVC Film w/ Acrylic Adhesive Kraft Paper Liner	Economical moisture protection. Conformable. Compatible with most sealants. Forms a permanent bond.	Moisture barrier for interior aircraft sections exposed to moisture such as galleys, lavatories, and entry ways.  <i>FAR 25.853(a); Fokker FK05-159 &amp; FK05-160; Bombardier 91-25-1, 91-25-2, 91-25-3, 91-25-3, 91-25-4, 91-25-5, 9-25-6</i>	9.5 0.241	50 5.47	25 43.78	10.7 362.8	-40 - 200 -40 - 93	Black
--	---	---	--------------	------------	-------------	---------------	-----------------------	-------

## Patco D9100/D9100SW PU Moisture Barrier Tape

Interior-grade PU Film w/ Urethane Adhesive Self wound or 94# Kraft Liner	Tough, elastic backing. Bonds directly over wet sealants. Easy to use at wide widths.	Moisture barrier for interior aircraft sections exposed to moisture such as galleys, lavatories, and entry ways.  <i>FAR 25.853a; Boeing BMS 8-346 Type I &amp; II Class 1; Airbus AIMS 10-05-004 (ABS 5093), ABD0031 Para 7.3.2 &amp; 7.4; Fokker FK05-193</i>	9.0 0.229	50 5.47	70 122.59	8.6 291.6	-65 - 300 -54 - 149	Clear
--	---	---	--------------	------------	--------------	--------------	------------------------	-------

## Patco D9180 PU Heavy-Duty Moisture Barrier Tape

Interior-grade PU Film w/ Urethane Adhesive 94# Kraft Liner	Tough, elastic backing. Bonds directly over wet sealants. Extra thickness for stay-flat and dimensional stability. Easy and fast to apply.	Moisture barrier for interior aircraft sections exposed to moisture such as galleys, lavatories, and entry ways.  <i>FAR 25.853(a); Fokker FK05-193</i>	14.0 0.356	45 4.92	100 175.00	13.05 442.47	-65 - 300 -54 - 149	Clear
---	--	---	---------------	------------	---------------	-----------------	------------------------	-------

## Patco D9200 PU Heavy-Duty Outdoor Moisture Barrier Tape


Exterior-grade PU Film w/ Acrylic Adhesive HDPE Liner	Tough, highly elastic film. Flame-retardant. Non-yellowing.	Moisture seal for floor joints in wet areas such as galleys, lavatories, and doorways.  <i>FAR 25.853(a); Fokker FK05-193</i>	14.0 0.356	80 8.75	80 140.10	12.60 427.21	-40 - 275 -40 - 135	Clear
--	---	---	---------------	------------	--------------	-----------------	------------------------	-------

## Patco 9425FR SealDry™ Lightweight Moisture Barrier Tape

Interior-grade PU Film w/ Acrylic Adhesive HDPE Liner	Contains no plasticizers or PBDEs. Tough, durable backing. Lightweight material saves cost. Moderately aggressive adhesive for repositioning and clean removal.	Light-weight moisture barrier for interior aircraft sections exposed to moisture such as galleys, lavatories, and entry ways.  <i>FAR 25.853(a); Boeing BMS 8-346, Type 1 Class 3; Bombardier BAMS 535-007 Type VI</i>	6.0 0.152	28 3.06	34 59.54	5.0 169.53	-10 - 250 -23 - 157	Clear
--	---	--	--------------	------------	-------------	---------------	------------------------	-------

# Carpet Tapes

POLYKEN double-coated carpet tapes provide exceptional bonding to hold carpet in place in aircraft cabin interiors and stairs. Carpet tape eliminates the need for mechanical fasteners that not only add weight, but can also introduce hazard to the aircraft. They can be used to secure carpeting at the time of manufacture, during maintenance and also be used for in-field repairs to eliminate tripping hazards and reduce aircraft down-time. POLYKEN carpet tapes install easily and remove cleanly from floor panels for fast, easy changeover.

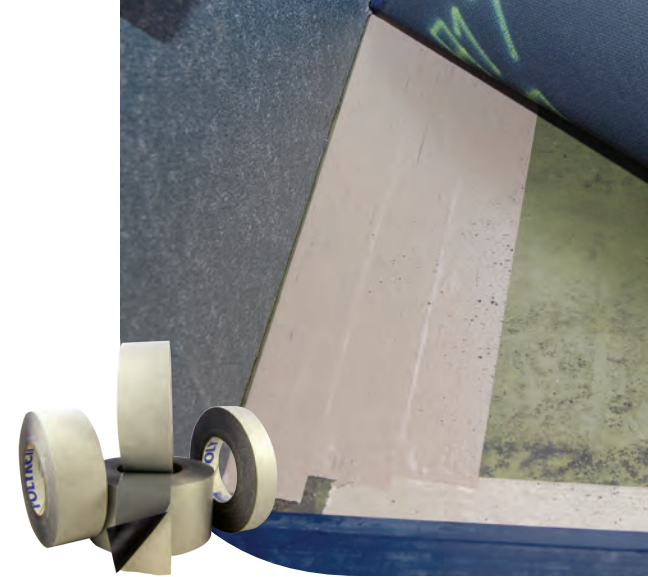

Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Weight oz/sy / g/sm	Operating Temp. °F / °C	Colors
Polyken 108FR Premium Carpet Tape								
Cloth w/ FR Rubber Adhesive HDPE Liner	High strength flame retardant adhesive bonds well to surfaces. Repositionable. Clean removal.	Carpet installation in passenger areas for aircraft, automotive, or marine applications. Mounting and bonding for general machine and shop handling.  FAR 25.853(a); Boeing BMS 5-133 Type II, Class 1 & 2, BAC5034-4 Sec. 5.1.a(1)(b); Bombardier DSC 91-8-1 & 91-8-2; Embraer MEP 06-048; Fokker FK05-121 & FK05-197; Lockheed LAC C-24-1257	15.0 0.381	60 6.56	55 96.32	13.0 472.9	40 - 200 4 - 93	Natural, Black
Polyken 1111FR Lightweight Carpet Tape								
Lightweight PET Film w/ Differential Adhesive Kraft Liner	Ultra-lightweight formulation for improved fuel economy. High strength flame retardant adhesive bonds well to surfaces. Repositionable. Clean removal.	Carpet installation in passenger areas for aircraft, automotive, or marine applications. Multi-purpose mounting and bonding. Additional delivery option available: 1112FR with liner on low adhesion side.  FAR 25.853(a); Boeing BMS 5-133 Type IV, Class 1; Airbus ABD0031, Para 7.2 & 7.4	3.9 0.099	Floor/Air 42 4.60  Carpet/ Liner 126 13.80	27 152.6	4.5 152.6	20 - 180 -7 - 82	Black/ Gray
Polyken 105C Multi-Purpose Carpet Tape								
Non-FR Cloth w/ Rubber Adhesive LDPE or Kraft Liner	Excellent adhesion particularly for rough surfaces. Clean removal. Easy-to-use release liner for smooth unwind.	Temporary carpet installation (non-FR). Multi-purpose mounting and bonding for general machine and shop handling.  Boeing BAC5034-4 Sec. 5.1.a(1)(a)	11.0 0.279	40 4.38	20 35.03	8.8 298.4	40 - 200 4 - 93	Natural



# Mounting Tapes

POLYKEN double-coated film mounting tapes offer a thin, low-profile adhesive that bonds permanently to plastics, aluminum, steel, paper, vinyl and more to secure bonded details such as signs, placards, decals, and interior trim pieces throughout the aircraft. Also used for temporary hold-down uses, double-coated mounting tapes can secure parts and materials during milling and machining operations.



Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Weight oz/sy / g/sm	Operating Temp. °F / °C	Colors
----------------------	----------	------------------------------	-----------------------	-----------------------------------	----------------------------------	------------------------	----------------------------	--------

## Polyken 36H High-Bond Mounting Tape

PET Film w/ Acrylic Adhesive Kraft Liner	Excellent adhesion. High shear strength and abrasion resistance. Chemical and moisture resistant. Permanent hold.	Securing signs, placards, decals, and interior trim pieces on aircraft. General purpose mounting and hanging.  <i>Boeing BMS 5-173 Type 1, Class 1, Grade A</i>	4.3 0.109	Air 88 / 9.63  Liner 93 / 10.17	16 28.02	3.8 128.9	30 - 200 -1 - 93	Clear
---	---	---	--------------	---	-------------	--------------	---------------------	-------

## Polyken 126 Light-Weight Mounting Tape

PET Film w/ Acrylic Adhesive Kraft Liner	Thin and conformable. Well-suited to high temperature applications. High tack for quick grab to surfaces.	Temporary bonding for machining and milling of aircraft parts. Securing nameplates, faceplates, and decorative trim.	3.8 0.097	25 2.74	6.0 10.51	3.0 101.7	0 - 395 -17 - 201	Clear
---	---	--	--------------	------------	--------------	--------------	----------------------	-------


## Polyken 726 Light-Weight Mounting Tape (Red)

PET Film w/ Acrylic Adhesive Kraft Liner	Thin and conformable. Well-suited to high temperature applications. High tack for quick grab to surfaces.	Temporary bonding for machining and milling of aircraft parts. Securing nameplates, faceplates, and decorative trim.	3.8 0.097	25 2.74	6.0 10.51	3.0 101.7	0 - 395 -17 - 201	Red
---	---	--	--------------	------------	--------------	--------------	----------------------	-----



# Foil & Speed Tapes

POLYKEN offers a variety of foil tapes designed for multiple maintenance and aircraft uses - from heat shielding, surface masking and protection during paint stripping, welding applications, autoclaving and composites, repair uses, to insulation sealing, and more. The POLYKEN assortment features several foil thicknesses to deliver conformability and strength as well as either rubber or acrylic adhesive options to suit the temperature requirements of unique and challenging applications.

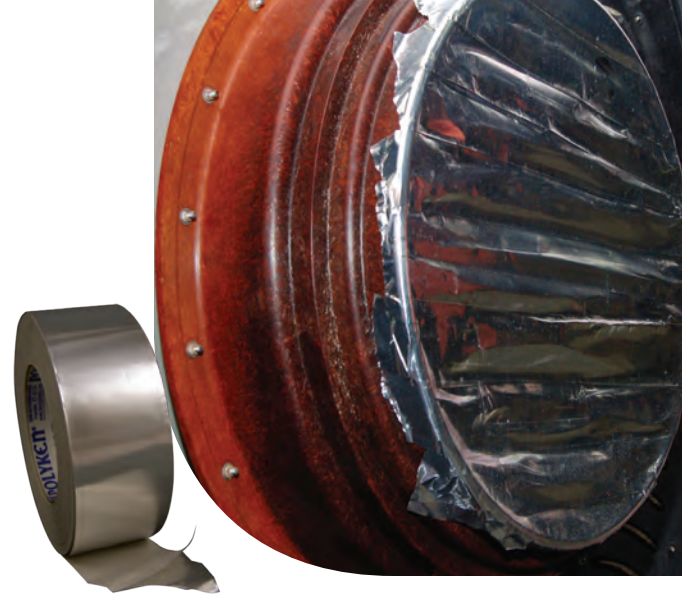

Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Elongation %	Operating Temp. °F / °C
<b>Polyken 345SW Self-Wound Speed Tape</b>							
3 mil Aluminum Foil w/ Acrylic Adhesive	Excellent adhesion. Clean removal from most surfaces. High shear strength and abrasion resistance. Superior chemical and moisture resistance.	Aircraft sealing and masking applications to prevent crazing and hazing during paint stripping. Moisture barrier in the production of military munitions and appliances. Anodizing, electroplating, and composites.  <i>FAR 25.853(a); SAE AMS-T-23397B; L-T-80B; Fokker Fk 05-011</i>	5.0 0.127	68 7.44	26 45.53	3	-40 - 350 -40 - 177
<b>Polyken 347 Lined Speed Tape</b>							
3 mil Aluminum Foil w/ Acrylic Adhesive Kraft Liner	Excellent adhesion. Clean removal adhesive. High shear strength and abrasion resistance. Superior chemical and moisture resistance. Available 26" width.	Aircraft sealing and masking applications to prevent crazing and hazing during paint stripping. Moisture barrier in the production of military munitions and appliances. Anodizing, electroplating, and composites.  <i>FAR 25.853(a); SAE AMS-T-23397B; L-T-80B; Fokker Fk 05-011</i>	5.0 0.127	68 7.44	26 45.53	3	-40 - 350 -40 - 177
<b>Polyken 332 Utility Grade Foil Tape</b>							
1.5 mil Aluminum Foil w/ Synthetic Rubber Adhesive Kraft Liner	Exceptional quick-stick. Conformable foil backing. Easy to use and install. Mold and mildew resistant.	Insulation seaming and patching. General repair.  <i>UL 723 Classified</i>	3.2 0.081	75 8.21	11 19.26	N/A	40 - 200 4 - 93
<b>Polyken 330X High Temperature Foil Tape (260 °F)</b>							
1.75 mil Aluminum Foil w/ Acrylic Adhesive Kraft Liner	Exceptional performance in all temperature environments. Conformable foil backing. Easy to use. High Tack. Mold and mildew resistant.	Sealing and masking in extreme heat, extreme cold, and indoor/outdoor conditions in aerospace applications. General repairs.  <i>UL 723 Classified; FAR 25.853(a)</i>	3.5 0.089	55 6.02	14 24.52	N/A	-35 - 260 -37 - 126
<b>Polyken 335FT High Temperature Foil (500 °F)</b>							
1.75 mil Aluminum Foil w/ Acrylic Adhesive Kraft Liner	Exceptional performance in all temperature environments. Conformable foil backing. Easy to use. High Tack. Mold and mildew resistant.	Sealing and masking in extreme heat, extreme cold, and indoor/outdoor conditions in aerospace applications. General repairs.  <i>UL 723 Classified; FAR 25.853(a)</i>	3.5 0.089	55 6.02	14 24.52	N/A	-50 - 500 -65 - 460

# Interior Surface Protection

Featuring clean removal adhesive systems, PATCO interior surface protection tapes are deployed during maintenance operations to protect a variety of aircraft surfaces from scratches, puncture, and exposure to moisture or chemicals. Designed to remove cleanly after the maintenance operations are complete, interior surface protection tapes can be used on control panel surfaces, wood and coated surfaces, fabrics and leather, plastics, metals, and more.



Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Elongation %	Operating Temp. °F / °C	Colors
<b>Patco 5565FR PE General Surface Protection Tape</b>								
LDPE Film w/ Acrylic Adhesive	Thick, highly conformable. Abrasion, moisture, and solvent-resistant. Clean removal from most surfaces. Easy to apply. Excellent all-temperature performance.	Aircraft general surface protection applications on various interior materials during maintenance and repair operations.  FAR 25.853(a)	5.5 0.140	12 1.31	12 21.02	500	-40 - 190 -40 - 88	Clear, Trans. Orange
<b>Patco 8450 PU Heavy-Duty Surface Protection Tape</b>								
Interior-grade PU Film w/ Acrylic Adhesive 94# Kraft Liner	Tough, durable, abrasion-resistant film. Excellent aging properties. Solvent-resistant. Excellent conformability.	Heavy-duty surface protection on most metals and plastics. Squeak and rattle protection. Noise and vibration damping. Moisture barrier.	9.5 0.241	75 8.21	40 70.05	700	-40 - 250 -40 - 121	Black
<b>Patco 3910R PP Interior Surface Protection Tape</b>								
Embossed OPP Film w/ Rubber Adhesive	Conformable and heat-resistant. Does not lift during molding or shaping. Removes cleanly from most surfaces. Smooth, easy unwind.	Aircraft general surface protection applications for control panels, corners, panels, and signs that are subjected to possible damage during maintenance.	4.1 0.104	17 1.86	14 24.52	700	-40 - 325 -40 - 162	Clear, Tinted Red



# Exterior Surface Protection

PATCO offers high performance tapes for protecting the exterior surfaces of aircraft. Applications include high visibility sealing and protecting critical static ports, direct protective mask during paint or cleaning operations, preservation and sealing during transport or storage, and leading edge protection to prevent chips and damage that can reduce aircraft efficiency. Designed for use outdoors, exterior surface protection tapes hold up to the elements during both short and long-term exposure uses.



Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Elongation %	Operating Temp. °F / °C	Colors
----------------------	----------	------------------------------	--------------------	--------------------------------	-------------------------------	--------------	-------------------------	--------

## Patco 5030 Static Port Protection Tape

PE Film w/ Acrylic Adhesive	High visibility colors. Conformable. Excellent moisture barrier properties. High adhesion. Excellent high-low temperature performance.	High visibility static port protection. Temporary indoor/outdoor surface protection. Color coding and parts marking. General purpose sealing.	5.5 0.140	50 5.47	11 19.26	400	-40 - 190 -40 - 88	Gloss Yellow, Orange, Red
-----------------------------	--	---	--------------	------------	-------------	-----	-----------------------	---------------------------


## Patco 5410 PE Long-Term Outdoor Protection Tape

UV-Stable LDPE Film w/ Rubber Adhesive	UV and weather-resistant. Excellent low temperature adhesion. Chemical and abrasion resistant.	Long-term preservation, sealing, and splicing applications. Direct protective mask on aircraft. Used in conjunction with outdoor shrink film for extended outdoor storage.	9.0 0.229	25 2.74	17 29.77	600	-40 - 200 -40 - 93	White
--	--	--	--------------	------------	-------------	-----	-----------------------	-------

## Patco 8300 PU Leading Edge Protection Tape

Exterior-grade PU Film w/ Acrylic Adhesive 94# Kraft Liner	Clear, non-yellowing film backing. Excellent long-term aging. Will not lift, stain, or dry-out. Superior conformability and ease-of-use.	Exterior surface protection film for aircraft leading and trailing edges. Protects aluminum skin from foreign object damage and rain erosion.	14.5 0.368	110 12.03	80 140.10	500	-40 - 275 -40 - 135	Clear
---	--	---	---------------	--------------	--------------	-----	------------------------	-------

*Fokker FK05-193*

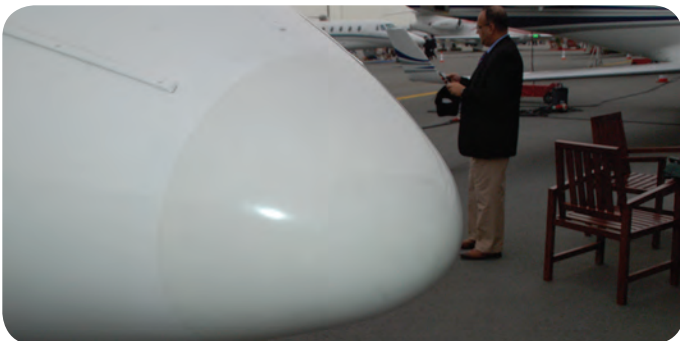

# Masking Tapes

Whether masking fine color separations, bulk masking for power washing or paint line applications, media blast masking protection, or protecting composites during manufacture, POLYKEN & PATCO offer engineered masking tape solutions providing the right balance of conformability, high temperature bonding, moisture and solvent resistance, and clean removal every time.



Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Elongation %	Operating Temp. °F / °C	Colors
----------------------	----------	------------------------------	-----------------------	-----------------------------------	----------------------------------	-----------------	----------------------------	--------

## Polyken 253 Media Blast Protection Tape

PE Coated Cloth w/ Rubber Adhesive	Extremely tough and durable backing withstands media blast exposure. High bond rubber adhesive holds strong to smooth or rough surfaces.	Temporary surface protection for sheet metal, aluminum, and other materials during sand blast or other media blast operations. Heavy duty bundling, sealing, and patching.	12 0.330	95 10.39	50 87.56	N/A	40 - 200 4 - 93	Silver, Black
------------------------------------	--	--	-------------	-------------	-------------	-----	--------------------	---------------

## Patco 179 High Temp PVC Finline Masking Tape

PVC Film w/ Rubber Adhesive	Conformable to handle compound curves and details. Non-glare finish. Solvent-resistant. High temperature performance. Clean removal from most substrates.	Finline masking on plastic fascia, trim, and finished metals during paint line and power wash. Short-term outdoor masking (<72 hrs). Electroplating and metal anodizing.	5.5 0.140	15 1.64	15 26.27	100	40 - 280 4 - 138	Blue (Matte)
-----------------------------	---	--	--------------	------------	-------------	-----	---------------------	--------------

## Patco 1676 High Temp PVC Finline Masking Tape

PVC Film w/ Rubber Adhesive	Conformable to handle compound curves and details. Strong tack and adhesion. Solvent-resistant. High temperature performance. Clean removal from most substrates.	OEM and aftermarket fineline masking. Paint line and power wash masking. Aircraft and clean room paint masking.	5.5 0.140	24 2.63	16 28.02	110	40 - 280 4 - 138	Light Blue
-----------------------------	---	---	--------------	------------	-------------	-----	---------------------	------------

## Patco 1776 High Temp PVC Finline Masking Tape

PVC Film w/ Rubber Adhesive	Extreme high temperature performance. Tough and conformable. Moisture and solvent-resistant. Repositionable. Clean removal from most substrates. Low stretch film.	OEM and aftermarket fineline masking. Paint line and power wash masking.	5.5 0.140	22 2.41	17 29.77	190	40 - 325 4 - 162	Yellow (Matte)
-----------------------------	--	--	--------------	------------	-------------	-----	---------------------	----------------

## Patco 3305 High Temp PP Finline Masking Tape

Embossed OPP Film w/ Urethane Adhesive	Translucent for easy application. Tough and conformable - doesn't wrinkle on curves and corners. Moisture and solvent-resistant. Repositionable. Clean removal from most substrates.	OEM and aftermarket fineline masking. Masking color separations on plastic, aluminum, steel, and fiberglass. Suitable for bake cycles of up to 280 °F for 45 minutes.	5.0 0.127	30 3.28	13 22.77	700	-40 - 250 -40 - 121	Green
--	--	---	--------------	------------	-------------	-----	------------------------	-------

## Polyken 781 PET Composite Protection Tape

PET Film w/ Silicone Adhesive	Tough polyester film backing. Excellent adhesion to silicone-coated materials. Excellent shear strength and adhesion. Resists high temperatures and offers excellent chemical resistance. Self wound construction.	Mask and protect surfaces during anodizing and chemical milling. Composite moulding applications.	2.8 0.071	35 3.83	25 43.78	130	0 - 395 -18 - 202	Blue, Red
-------------------------------	--	---	--------------	------------	-------------	-----	----------------------	-----------

# Cloth Tapes

POLYKEN is a pioneer in the development of high performance cloth tapes for repair, bundling, color coding and marking, hanging and sealing PE sheeting, duct sealing, and more. POLYKEN multi-purpose duct tapes, military-grade duct tapes, and matte-finish clean removal gaffer tapes perform in a wide range of aircraft maintenance facility uses.



Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Operating Temp. °F / °C	Colors
<b>Polyken 203 Multi-Purpose Duct Tape</b>							
PE Coated Cloth w/ Rubber Adhesive	Good balance of adhesion, tensile, and tack. Excellent tear. Stiff adhesive offers clean removability from most surfaces.	Bundling, packaging, seaming, and general repairs. Color coding.	9.0 0.229	85 9.30	27 47.28	40 - 200 4 - 93	Silver, Black, Red, Blue, Green, Olive Drab, Brown, White, Yellow
<b>Polyken 231 Premium Military Grade Duct Tape</b>							
PE Coated Cloth w/ Rubber Adhesive	Durable, waterproof backing. Extra high adhesion for permanent bonds. Crisp, straight tear.	Premium grade duct tape for packaging, sealing, and waterproofing.  <i>Meets ASTM D-5486 Type IV, Class 1; Douglas DPM 871-3</i>	12.0 0.305	95 10.39	50 87.56	40 - 200 4 - 93	Olive Drab, Black
<b>Polyken 222 Premium Duct Tape</b>							
PE Coated Cloth w/ Rubber Adhesive	Durable, waterproof backing. Extra high adhesion for permanent bonds. Crisp, straight tear.	Premium grade duct tape for packaging, sealing, and waterproofing.	12.0 0.305	90 9.85	36 63.05	40 - 200 4 - 93	Olive Drab, Silver
<b>Polyken 510 Premium Gaffer Tape</b>							
Matte-Finish Coated Cloth w/ Natural Rubber Adhesive	Durable, matte-finish, printable backing. High adhesion and high shear. Clean removal from most surfaces. 12+ colors available.	Indoor/Outdoor wire hold-down. Color coding. Marking hazards. Parts identification.	11.5 0.292	50 5.47	42 73.55	40 - 200 4 - 93	Neon Yellow, Neon Pink, Neon Orange, Neon Green, Black, White, Gray, Beige, Burgundy, Navy Blue, Red, Green, Yellow, Brown, Tan, Teal, Olive Drab, Royal Blue, Purple
<b>Polyken 512 Multi-Purpose Gaffer Tape</b>							
Matte-Finish Coated Cloth w/ Synthetic Rubber Adhesive	Durable, matte-finish, printable backing. High adhesion and high shear. Clean removal from most surfaces. 12+ colors available.	Indoor/Outdoor wire hold-down. Color coding. Marking hazards. Parts identification.	12.0 0.305	66 7.22	40 70.05	40 - 200 4 - 93	Black, White, Gray, Beige, Red, Brown, Navy Blue, Neon Orange, Neon Pink, Yellow



# PE Film Tapes

POLYKEN offers an exceptional range of polyethylene film tapes for indoor and outdoor uses such as hanging, sealing, seaming, patching, and repairing polyethylene sheeting and tarps. PE film tapes are ideal for temporary attachment of work orders, protective materials, labels, or placards, and can also be used to hang and seal sheeting materials to create temporary containment areas during cleaning and maintenance operations.




Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Elongation %	Operating Temp. °F / °C	Colors
<b>Polyken 759 Heavy-Duty PE Film Tape</b>								
PE Film w/ Synthetic Rubber Adhesive	Conformable. Thick and durable. Strong bond to poly sheeting. Excellent shear strength.	Heavy-duty polyethylene splicing and hanging. Creating temporary enclosure and containment areas. Dissimilar metal separation.	9.0 0.229	85 9.30	30 52.54	65	40 - 200 4 - 93	Clear, Red, White
<b>Polyken 767UV Multi-Purpose Outdoor PE Film Tape</b>								
PE Film w/ Synthetic Rubber Adhesive	UV resistant for up to 28 days of exposure. Removes clean from most surfaces. Excellent adhesion and tack.	Outdoor seaming, sealing, and hanging of poly sheeting. Creating temporary enclosure and containment areas. Dissimilar metal separation. Temporary outdoor surface protection.	7.0 0.178	75 8.21	25 43.78	85	20 - 200 -7 - 93	Red, White
<b>Polyken 769UV Heavy-Duty Outdoor PE Film Tape</b>								
PE Film w/ Synthetic Rubber Adhesive	UV resistant for up to 28 days of exposure. Removes clean from most surfaces. Excellent adhesion and tack. Strong, heavy-duty backing resists abrasion and the elements.	Outdoor seaming, sealing, and hanging of poly sheeting. Creating temporary enclosure and containment areas. Dissimilar metal separation. Temporary outdoor surface protection.	9.0 0.229	85 9.30	32 56.04	70	20 - 200 -7 - 93	Red, White



# Electrical Tapes

Utilizing our adhesive engineering experience for the automotive industry, POLYKEN offers a number of products uniquely suited for sealing, wrapping, splicing, and protecting electrical wires and harnesses used in the aerospace industry.

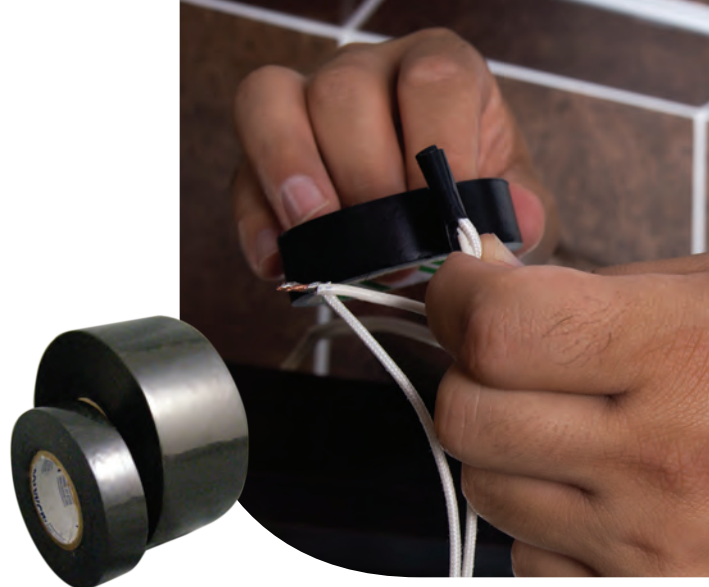

Product Construction	Features	Applications/ Specifications	Thickness mil / mm	Adhesion to Steel oz/in / N/cm	Tensile Strength lb/in / N/cm	Operating Temp. °F / °C	Colors
<b>Patco 1800 Heavy-Duty Electrical Tape</b>							
PVC Film w/ Acrylic Adhesive Kraft Liner	Economical moisture protection. Conformable. Compatible with most sealants. Forms a permanent bond.	Heavy-duty electrical wrapping and splicing. High and low temperature applications.  <i>FAR 25.853(a)</i>	9.5 0.241	50 5.47	25 43.78	-40 - 200 -40 - 93	Black
<b>Polyken 823 Premium Electrical Tape</b>							
PE Film w/ Rubber Adhesive	Superior extreme weather performance including sub-zero conditions. Provides maximum electrical insulation properties. Solvent and moisture resistant.	Electrical and maintenance applications where PVC materials are not permitted. Wrapping and waterproofing wire harnesses.  <i>UL 510 Classified; Douglas DPM 881</i>	9.5 0.241	31 3.39	17 29.77	-40 - 180 -40 - 82	Black
<b>Berry 777/B17 General Purpose Electrical Tape</b>							
PVC Film w/ Rubber Adhesive	Excellent stretch and conformability. Good adhesion. 600V/wrap dielectric strength.	General Purpose wrapping and splicing for electrical wires. Color coding.  <i>UL 510 Classified</i>	7.0 0.178	25 2.74	20 35.02	40 - 180 4 - 82	Black (777) Blue, Green, White, Red (B17)
<b>Stretch &amp; Seal Self-Fusing Silicone Sealing Tape</b>							
Self-Fusing Silicone Film Cellophane Liner	High temperature resistance. Bonds well even in wet conditions. Excellent abrasion resistance and dielectric strength. Leaves no residue.	Wrapping applications including electrical, light-duty pipe wrapping, plumbing and waterproofing. Excellent for temporary bundling and clamping. Wrap tool handles to form an instant grip. Also available FR.  <i>UL 510 Classified; A-A-59163 Type I and II</i>	20.0 0.508	N/A	800 psi	-60 - 500 -51 - 260	Black, Clear, White, Blue

# Specification Table

SPECIFIER	SPECIFICATION NO.	PRODUCT NO.
Airbus	AIMS 10-05-004A (ABS 5093)	Patco D9100, D9100SW
	ABD0031, Paragraphs 7.3.2	Polyken 290FR, 296FR, 108FR, 1111; Patco D9100, D9100SW
	ABD0031, Paragraphs 7.4	Polyken 290FR, 296FR, 1111; Patco D9100, D9100SW
Boeing	BMS 5-133 Type II, Class 1 & 2	Polyken 108FR (Natural - Class 1; Black - Class 2)
	BMS 5-133 Type IV, Class 1	Polyken 1111
	BAC5034-4 Sec 5.1.a(1)(a)	Polyken 105C
	BAC5034-4 Sec 5.1.a(1)(b)	Polyken 108FR
	BMS 5-146	Polyken 296FR
	BMS 8-346 Type I & II, Class 1	Patco D9100, D9100SW
	BMS 8-346 Type I, Class 3	Patco 9425FR
	BMS 5-173 Type I, Class 1, Grade A	Polyken 36H
	737-SL-25-115-B	Polyken 290FR, 297, 296FR
	737-SL-25-085-B	Polyken 290FR, 297, 296FR
	747-SL-25-195-B	Polyken 290FR, 297, 296FR
	767-SL-25-112-B	Polyken 290FR, 297, 296FR
	777-SL-25-037-B	Polyken 290FR, 297, 296FR
Bombardier/ deHavilland	DSC 91-8-1	Polyken 108FR
	DSC 91-8-2	Polyken 108FR, 290FR
	DSC 91-8-2A	Polyken 290FR
	DSC 91-25-2, -3, -4, -5, -6	Patco 1800
	BAMS 535-007 Type VI	Patco 9425FR
Douglas / Boeing	DMS 1968E	Polyken 225FR
	DPM 871-2	Polyken 827
	DPM 871-3	Polyken 827 & 231
	DPM 877-1	Polyken 827
	DPM 881	Polyken 823
Embraer	MEP 06-048	Polyken 108FR
FAA	FAR 25.853(a)	Polyken 290FR, 297, 296FR, 108FR, 225FR, 345SW, 347, 330X; Patco 5565FR, 1800, D9100, D9100SW, D9180, D9200, 9425FR
	FAR 25.855(d)	Polyken 290FR, 294FR, 297, 296FR
Fokker	FK05-006, FK05-113	Polyken 225FR
	FK05-011	Polyken 345SW
	FK05-121, FK05-197	Polyken 108FR
	FK05-159 & FK05-160	Patco 1800FR
	FK05-193	Patco 8300, D9100, D9180, D9200
Lockheed	LCP-86-1226-A	Polyken 225FR
	LAC C-24-1257	Polyken 108FR
Military	A-A-59163 Type I & II	Nashua Stretch & Seal
	ASTM D-5486 Type IV Class 1	Polyken 231
	PPP-T-60D	Polyken 231
	L-T-80B	Polyken 345SW
	SAE AMS-T-23397B	Polyken 345SW
Underwriters Laboratories	UL 510	Berry B17, 777; Polyken 823; Nashua Stretch & Seal
	UL 723	Polyken 330X, 332



# Shelf Life, Storage, and More

\*From date of manufacture. \*From date of shipment.

PRODUCT TYPE	PRODUCT NUMBERS	SHELF LIFE
Cargo Pit Tapes	290FR, 296FR, 297, 225FR	2 years*
Carpet & Mounting Tapes	108FR, 105C, 126, 726, 36H	2 years*
Lightweight Carpet Tapes	1111FR	3 years*
Moisture Barrier & Electrical Tapes	1800	1 year†
Moisture Barrier & Surface Protection Tapes	8300, D9100, D9180, D9200, 9425FR	2 years*
Surface Protection & Masking	179, 1676, 1776, 3305, 5410, 5565FR, 3910R, 8450	1 year†
Speed Tape	345SW, 347	2 years*
PE Film Tapes	759*, 767UV*, 769UV*, 823*, 5030†	2 years
Duct & Foil Tapes	203, 222, 231, 253, 330X, 332, 335FT	3 years*
Gaffer Tapes	510, 512	1 year*
Electrical Tapes	777, Stretch & Seal®	1 year*
Electrical Tapes	B17	5 years*

## Recommended Storage

To ensure best possible shelf life, products should be stored

- in the original dry carton
- off of the floor
- in a well-ventilated area
- in temperatures conditions from 60° - 80 °F and relative humidity of 40 - 60%.

## More from Berry Global...

### CHICOPEE®

**DuraWipe™** general purpose industrial wipes are engineered from proprietary, triple-layer Spinnacle® construction. These super-absorbent wipes are strong enough for the greasiest and grimeiest of surfaces, yet soft enough to be used to clean hands and face. DuraWipe is available in a variety of sizes and colors.

**VeraClean™** high-performance, low-linting critical cleaning wipes are ultra-soft and engineered to remove remaining residue, dirt particles, and fingerprints not necessarily visible to the eye. VeraClean is an ideal solution for automotive and aerospace manufacturing and aftermarket finishing touches.



Visit [chicopee.com](http://chicopee.com) or email the Chicopee customer care team at [specialty@berryglobal.com](mailto:specialty@berryglobal.com) to learn more.

## Military-Grade Flexible Packaging

Berry Global is a leader in laminated materials for use in packaging and protection applications. Designed for maximum strength, excellent durability, and long-term barrier protection, Berry's flexible packaging structures meet rigid military and government standards. Berry Global has the flexible packaging solution to meet your application needs!



Contact Berry Global customer care at 1-800-343-7875 today!



# Specification List

SPECIFIER	SPECIFICATION NO.	PRODUCT NO.
Airbus	AIMS 10-05-004A (ABS 5093)	Patco D9100, D9100SW
	ABD0031, Paragraphs 7.3.2	Polyken 290FR, 296FR, 108FR, 1111; Patco D9100, D9100SW
	ABD0031, Paragraphs 7.4	Polyken 290FR, 296FR, 1111; Patco D9100, D9100SW
Boeing	BMS 5-133 Type II, Class 1 & 2	Polyken 108FR (Natural - Class 1; Black - Class 2)
	BMS 5-133 Type IV, Class 1	Polyken 1111
	BAC5034-4 Sec 5.1.a(1)(a)	Polyken 105C
	BAC5034-4 Sec 5.1.a(1)(b)	Polyken 108FR
	BMS 5-146	Polyken 296FR
	BMS 8-346 Type I & II, Class 1	Patco D9100, D9100SW
	BMS 8-346 Type I, Class 3	Patco 9425FR
	BMS 5-173 Type I, Class 1, Grade A	Polyken 36H
	737-SL-25-115-B	Polyken 290FR, 297, 296FR
	737-SL-25-085-B	Polyken 290FR, 297, 296FR
	747-SL-25-195-B	Polyken 290FR, 297, 296FR
	767-SL-25-112-B	Polyken 290FR, 297, 296FR
	777-SL-25-037-B	Polyken 290FR, 297, 296FR
Bombardier/ deHavilland	DSC 91-8-1	Polyken 108FR
	DSC 91-8-2	Polyken 108FR, 290FR
	DSC 91-8-2A	Polyken 290FR
	DSC 91-25-2, -3, -4, -5, -6	Patco 1800
	BAMS 535-007 Type VI	Patco 9425FR
Douglas / Boeing	DMS 1968E	Polyken 225FR
	DPM 871-2	Polyken 827
	DPM 871-3	Polyken 827 & 231
	DPM 877-1	Polyken 827
	DPM 881	Polyken 823
Embraer	MEP 06-048	Polyken 108FR
FAA	FAR 25.853(a)	Polyken 290FR, 297, 296FR, 108FR, 225FR, 345SW, 347, 330X; Patco 5565FR, 1800, D9100, D9100SW, D9180, D9200, 9425FR
	FAR 25.855(d)	Polyken 290FR, 294FR, 297, 296FR
Fokker	FK05-006, FK05-113	Polyken 225FR
	FK05-011	Polyken 345SW
	FK05-121, Fk05-197	Polyken 108FR
	FK05-159 & FK05-160	Patco 1800FR
	FK05-193	Patco 8300, D9100, D9180, D9200
Lockheed	LCP-86-1226-A	Polyken 225FR
	LAC C-24-1257	Polyken 108FR
Military	A-A-59163 Type I & II	Nashua Stretch & Seal
	ASTM D-5486 Type IV Class 1	Polyken 231
	PPP-T-60D	Polyken 231
	L-T-80B	Polyken 345SW
	SAE AMS-T-23397B	Polyken 345SW
Underwriters Laboratories	UL 510	Berry B17, 777; Polyken 823; Nashua Stretch & Seal
	UL 723	Polyken 330X, 332